


Internal Manlift Tower

Features

- ❖ 1 Options to be fully sheeted or only sheeted at landings.
- ❖ 2 Engineered tie-offs customized to attach to existing structure.
- ❖ 3 Integrated 4' pit can be above ground or below grade.
- ❖ 4 Ships in 40' sections for quick install.
- ❖ 5 Preset electrical components for quick connect at section joints.

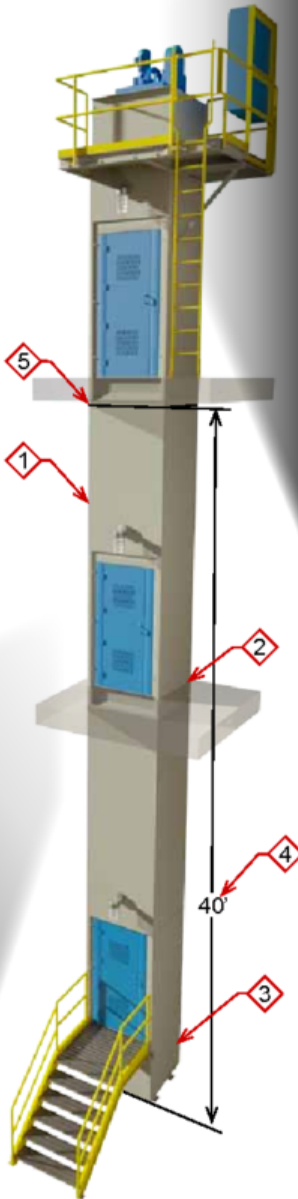

Service Platform Option

- ❖ Self supported platform for servicing motor and controller.
- ❖ Pre-wired for quick electrical installation.
- ❖ Option when overhead clearance is available inside the facility.



- ❖ Pre-Installed Elevator Components.
- ❖ Adjustable doors for flush entry.
- ❖ Pre-assembled modular tower gets set in place as little as a day.



Machine Room Option

- ❖ Spacious machine room for servicing motor and controller.
- ❖ Pre-wired for quick electrical installation.
- ❖ Option is typical when locating overhead drive equipment above the roof.